


# SEIKO


## A、B、BE TYPE CAM SWITCH



A TYPE

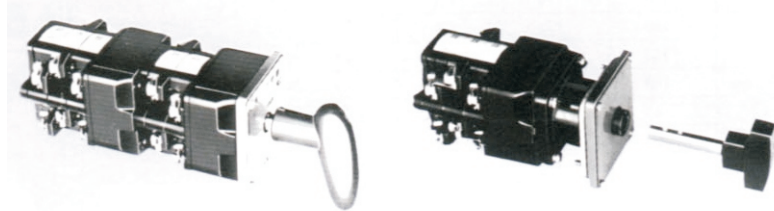

B TYPE

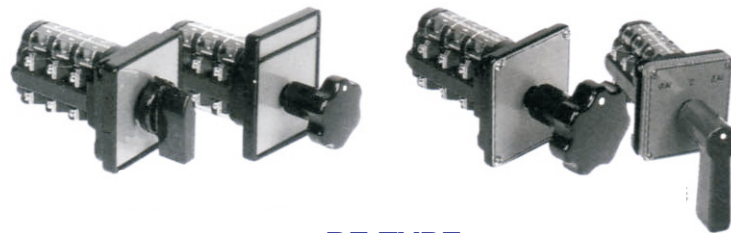

BE TYPE

### ● SPECIFICATION

MODEL		A TYPE	B、BE TYPE
STANDARD		JISC4520、JISC4522 (※BS4794)	
OPERATION TEMP		-20°C ~60°C	
HUMIDITY		45%~85%	
ISOLATION VOLTAGE		AC/DC 600V	
RUSH CURRENT		20A	16A
CONTACTOR RESISTANCE		UNDER 50m Ω	
ISOLATION RESISTANCE		OVER 100M Ω	
DIELECTRIC VOLTAGE		AC 2500V 1 MIN.	
IMPULSE VOLTAGE		7000V 1.2/50μs	
L I F E	MACHINERY		OVER ONE MILLION TIMES
	ELECTRICAL	AC	750,000 (OVER)
		DC	250,000 (OVER)
VIBRATION		2G	
IMPULSE		50G	
VIEW OF CONTACTOR		CLEARLY TO SEE THROUGH PROTECTOR COVER	

# ORDER FORM



ORDER CODE	CONTENT
A	A TYPE
B	B TYPE
E	E TYPE

ORDER CODE	CONTENT
N	MENU OPERATION
R	SPRING RETURN
NR2	LEFT MENU /RIGHT NATURE
NR8	RIGHT MENU/LEFT NATURE
NK	MENU OPERATION W / KEY
RK	SPRING RETURN W / KEY

ORDER CODE	CONTENT
	NONE
PL	PULL & MENU OPERATION
PF	PUSH & MENU OPERATION
SL	PULL & NATURE OPERATION
SF	PULL & SPRING RETURN
K	KEY TYPE

ORDER CODE	CONTENT
	NONE
1	NO. OF OPERATION POSITION
2	
3	
4	
5	
6	
7	
8	
0	PUSH & PULL FOR EVERY POSITION INCLUDING KEY HANDLE

ORDER CODE	HANDLE
Y	NEEDLE
F	FUNNEL
Q	RECTANGLE
R	FLOWER
V	NO BALL
S	STICK
P	PISTOL
MY	
AR	
AV	
AS	
AP	
B	BUTTON
G	BALL

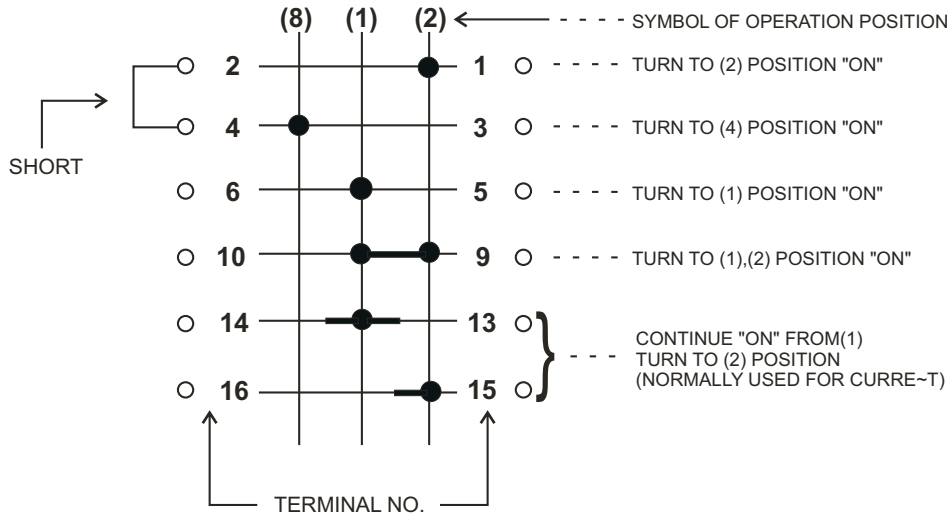

ORDER CODE	CONTENT
K	BLACK
M	GREEN
R	RED
T	BROWN

ORDER CODE	CONTENT
K	BLACK

PANEL THICKNESS  
(1.6~4.5mm)

HANDLE		Y	F	Q	R	V	S	P	B	Q
KIND	SHAPE									
	A				R	V	S	P	B	G
	B	Y	F	Q	R	V	S	P	B	G
	AB				AR	AV	AS	AP		
	E · BE	Y	F	Q	R	V	S	P		
	ME	MY								
	H · BH	Y			R					
	AH · AE				AR	AV	AS	AP		



MODEL NO	ANGLE	HANDLE	NAME PLATE	CONNECTION FIGURE
<b>BHN-A</b> ( A.S 3 ∅ 3W2CT )	45°		AMMETER R S T ○ ○ ○	
<b>BEN-3AC</b> ( A.S 3 ∅ 3W3CT )	90°		AMMETER ○ T ○ R S	
<b>BEN-3AN</b> ( A.S 3 ∅ 4W )	45°		AMMETER R S T ○ ○ N	
<b>BHN-V</b> ( V.S 3 ∅ 3W )	45°		VOLTMETER R-S S-T T-R 0 ○ 0	
<b>BEN-3VC</b> ( V.S 3 ∅ 4W )	45°		VOLTMETER R-S ○ R-N C S-T ○ S-N T-R T-N	
<b>AR-10</b> <b>BER-10</b> } <b>BER-40</b> <b>AR-40</b>	45°		OFF ON ○	
<b>BEN-C201</b> } <b>BEN-C206</b>	45°		OFF ON ○	
<b>BEN-C301</b> } <b>BEN-C306</b>	45°		OFF ON ○	
<b>ARSF1-10</b> <b>BRSF1-10</b> } <b>BRSF1-40</b> <b>ARSF1-40</b>	45°		OFF ON ○	
<b>AR-1011</b> <b>BR-1011</b> (附殘留接點)	45°		OFF ON ○	
<b>ARSF1-1011</b> <b>BRSF1-1011</b> (Pull & Turn 附殘留接點)	45°		OFF ON ○	
<b>AN-2AB</b> <b>AS</b> 3 ∅ 3W2CT	45°		AMMETER R S T ○ ○ ○	
<b>AN-4A</b> <b>AS</b> 3 ∅ 3W3CT	90°		AMMETER ○ T ○ R S	
<b>AN-3AN</b> <b>AS</b> 3 ∅ 4W	45°		AMMETER R S T ○ ○ N	
<b>AN-2V</b> <b>AS</b> 3 ∅ 3W	45°		VOLTMETER R-S S-T T-R 0 ○ 0	
<b>AN-5VN</b> <b>AS</b> 3 ∅ 4W	45°		VOLTMETER R-S ○ R-N C S-T ○ S-N T-R T-N	